

DH-HAC-HFW1400D 4MP HDCVI IR Bullet Camera



HDCVI

- · Max 30fps@4MP
- · HD and SD output switchable
- · 3.6mm fixed lens (6mm, 8mm, 12mm optional)
- · Max. IR length 80m, Smart IR
- · IP67, DC12V



System Overview

Experience superior 4MP video and the simplicity of reusing existing coaxial infrastructure with HDCVI. The Lite series 4MP HDCVI camera features a compact design and offers a high quality image with rich details at a friendly price. It offers various vari-focal/fixed lens models with a multi-language OSD and HD/SD switchable output. Its structural flexibility and high cost-performance makes the camera an ideal choice for SMB solutions.

Functions

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the HCVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

* Audio input is available for some models of HDCVI cameras.

Long Distance Transmission

HDCVI technology guarantees long-distance and real-time transmission without any loss. It supports up to 700m for 4MP HD video via coaxial cable, and up to 300m via UTP cable.*

*Actual results verified by real-scene testing in Dahua's test laboratory.

Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

Smart IR

The camera is designed with array LED IR illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua's unique Smart IR adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object come closer to the camera.

HD/SD Switchable

The camera supports switchable HDCVI high definition video output and CVBS standard definition video output. The two formats can be switched over through OSD menu or by PFM820(UTC controller). This feature makes the camera to be compatible with both HCVRs and existing analog DVRs and also facilitates debugging through analog testers.

Multi-language OSD

OSD menu provides multiple image adjustments and function settings to meet the requirements of different monitoring scenes. The OSD menu includes configurations such as backlight mode, day/night, white balance, privacy mask and motion detect. The camera supports 11 languages for OSD menu, namely, Chinese, English, French, German, Spanish, Portuguese, Italian, Japanese, Korean, Russian and Polish.

Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67 ranking, making it suitable for indoor or outdoor environments.

With working temperature range of -40 °C to +60 °C (-40 °F to +140 °F), the camera is designed for extreme temperature environments.

Supporting $\pm 25\%$ input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Lite Series | DH-HAC-HFW1400D

Technical Specification

Camera

Image Sensor	1/3" CMOS
Effective Pixels	2688(H)×1520(V), 4.1MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Minimum Illumination	0.03Lux/F2.0, 30IRE, 0Lux IR on
S/N Ratio	More than 65dB
IR Distance	Up to 80m (262feet)
IR On/Off Control	Auto / Manual
IR LEDs	2
Lens	
Lens Type	Fixed lens / Fixed iris
Mount Type	Board-in
Focal Length	3.6mm (6mm, 8mm, 12mm Optional)
Max Aperture	F2.0
Angle of View	H: 84.8° (52.5°/32.9°/23.6°)
Focus Control	N/A
Close Focus Distance	1100mm (2200mm/4000mm/8500mm) 43.3" (86.6"/157.5"/334.6")

DORI Distance

Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.

	DORI Definition	Distance
Detect	25px/m (8px/ft)	3.6mm: 80m(262ft) 6mm: 117m(385ft) 8mm: 161m(527ft) 12mm: 250m(820ft)
Observe	63px/m (19px/ft)	3.6mm: 32m(105ft) 6mm: 47m(154ft) 8mm: 64m(210ft) 12mm: 100m(328ft)
Recognize	125px/m (38px/ft)	3.6mm: 16m(53ft) 6mm: 23m(77ft) 8mm: 32m(105ft) 12mm: 50m(164ft)
Identify	250ppm (76px/ft)	3.6mm: 8m(26ft) 6mm: 12m(39ft) 8mm: 16m(53ft) 12mm: 25m(82ft)
Pan / Tilt / Rotation		

Pan / Tilt / Rotation

	Pan: 0° ~ 36
Pan/Tilt/Rotation	Tilt: 0° ~ 87°
	Rotation: 0°


Pan: 0° ~ 360° Tilt: 0° ~ 87° Rotation: 0° ~ 360°

Video	
Resolution	4MP (2560×1440)
Frame Rate	25/30fps@4MP, 25/30fps@1080P, 25/30fps@720P
Video Output	1-channel BNC high definition video output / CVBS video output (Can switch)
Day/Night	Auto (ICR) / Manual
OSD Menu	Multi-language
BLC Mode	BLC / HLC / DWDR
WDR	DWDR
Gain Control	AGC
Noise Reduction	2D
White Balance	Auto / Manual
Smart IR	Auto / Manual
Certifications	
Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
Interface	
Audio Interface	N/A
Eelectrical	
Power Supply	12V DC ±25%
Power Consumption	Max 5.2W (12V DC, IR on)
Environmental	
Operating Conditions	-40°C \sim +60°C (-40°F \sim +140°F) / Less than 90% RH * Start up should be done at above-40°C (-40°F)
Storage Conditions	-40°C $^{\sim}$ +60°C (-40°F $^{\sim}$ +140°F) / Less than 90% RH
Ingress Protection &Vandal Resistance	IP67
Construction	
Casing	Aluminium
Dimensions	241.8mm×90.4mm×90.4mm (9.52"×3.56"×3.56")
Net Weight	0.59kg (1.30lb)
Gross Weight	0.72kg (1.59lb)


Lite Series | DH-HAC-HFW1400D

Ordering	Information
----------	-------------

TypePart NumberDescriptionDH-HAC-HFW1400DP 3.6mmAppendent (Appendent)DH-HAC-HFW1400DP 6mmAppendent (Appendent)DH-HAC-HFW1400DP 3mmAppendent (Appendent)DH-HAC-HFW1400DN 3.6mmAppendent (Appendent)DH-HAC-HFW1400DN 3.6mmAppendent (Appendent)DH-HAC-HFW1400DN 3.6mmAppendent (Appendent)DH-HAC-HFW1400DN 3.6mmAppendent (Appendent)DH-HAC-HFW1400DN 12mmAppendent (Appendent)DH-HAC-HFW1400DN 12mmAppendent)DH-HAC-HFW1400DN 12mmAppendent)DH-HAC-HFW1400DN 12mmAppendent)DH-HAC-HFW1400DN 12mmAppendent)DH-HAC-HFW1400DN 12mmAppendent)DH-HAC-HFW1400DN 12mmAppendent)DH-HAC-HFW1400DN 12mmAppendent)DH-HAC-HFW1400DN 12mmAppendent)PFA130-EAppendent)PFA130-EAppendent)PFM30-EPasive HDCVI BalunPFM80-EPasive HDCVI Balun mith PowerPFM321I2V 1A Power AdapterPFM32D-D15I2V 1APower Adapter				
Image: Note of the series of the se	Туре	Part Number	Description	
AMP Camera HI-HAC-HFW1400DP 8mm DH-HAC-HFW1400DP 12mm DH-HAC-HFW1400DN 3.6mm DH-HAC-HFW1400DN 6mm DH-HAC-HFW1400DN 8mm DH-HAC-HFW1400DN 12mm DH-HAC-HFW1400DN 12mm FA130-E PFA130-E PFA130-E PFA130-E PFA130-E PFM800-4MP PFM800-4MP PFM801-4MP Passive HDCVI Balun PFM801-4MP Passive HDCVI Balun with Power PFM801-4MP Passive HDCVI Balun with Power PFM801-4MP Passive HDCVI Balun with Power PFM801-4MP PFM801-4MP Passive HDCVI Balun with Power PFM801-4MP Passive PASSIVE P	4MP Camera	DH-HAC-HFW1400DP 3.6mm	4MP HDCVI IR Bullet Camera, PAL	
DH-HAC-HFW1400DP 8mm Herein DH-HAC-HFW1400DP 12mm DH-HAC-HFW1400DN 3.6mm Marger 1000000000000000000000000000000000000		DH-HAC-HFW1400DP 6mm		
4MP CameraInteraction takingDH-HAC-HFW1400DN 3.6mmMPHDCVI IR Bullet Camera, MPHDCVI IR Bullet Camera, MTSCDH-HAC-HFW1400DN 8mmMPHDCVI IR Bullet Camera, MTSCDH-HAC-HFW1400DN 12mmMINITION box (For use alone or with PFA152-E pole mount)PFA130-EJunction box (For use alone or with PFA152-E pole mount)PFA152-EPole mount (For use with PFA130-E junction box)PFM800-EPole mount (For use with PFA130-E junction box)PFM800-4MPPassive HDCVI BalunPFM801-4MPPassive HDCVI Balun with PowerPFM321I2V 1A Power Adapter		DH-HAC-HFW1400DP 8mm		
DH-HAC-HFW1400DN 3.6mmHPHCVI IR Bullet Camera, MP HDCVI IR Bullet Camera, MTSCDH-HAC-HFW1400DN 8mmNTSCDH-HAC-HFW1400DN 12mmVinction box (For use alone or with PFA152-E pole mount)PFA130-EPole mount (For use with PFA130-E junction box)PFM800-EPole mount (For use with PFA130-E junction box)PFM800-4MPPassive HDCVI BalunPFM801-4MPPassive HDCVI Balun with PowerPFM32112V 1A Power Adapter		DH-HAC-HFW1400DP 12mm		
Accessories PFM80-4MP and the action of the		DH-HAC-HFW1400DN 3.6mm		
Accessories PFM800-4MP Performance Perform		DH-HAC-HFW1400DN 6mm		
PFA130-EJunction box (For use alone or with PFA152-E pole mount)PFA152-EPole mount (For use with PFA130-E junction box)PFM800-EPassive HDCVI BalunPFM800-4MPPassive HDCVI BalunPFM801-4MPPassive HDCVI Balun with PowerPFM32112V 1A Power Adapter		DH-HAC-HFW1400DN 8mm		
PFA130-E with PFA152-E pole mount) PFA152-E Pole mount (For use with PFA130-E junction box) PFM800-E Passive HDCVI Balun PFM800-4MP Passive HDCVI Balun PFM801-4MP Passive HDCVI Balun with Power PFM321 12V 1A Power Adapter		DH-HAC-HFW1400DN 12mm		
Accessories PFA130-E processories PFA130-E junction box) PFM800-E Passive HDCVI Balun PFM800-4MP Passive HDCVI Balun with Power PFM801-4MP Passive HDCVI Balun with Power PFM321 12V 1A Power Adapter	Accessories	РҒА130-Е		
Accessories PFM800-4MP Passive HDCVI Balun with Power PFM801-4MP Passive HDCVI Balun with Power PFM321 12V 1A Power Adapter		PFA152-E		
PFM800-4MP Passive HDCVI Balun PFM801-4MP Passive HDCVI Balun with Power PFM321 12V 1A Power Adapter		РҒМ800-Е	Passive HDCVI Balun	
PFM321 12V 1A Power Adapter		PFM800-4MP	Passive HDCVI Balun	
		PFM801-4MP	Passive HDCVI Balun with Power	
PFM320D-015 12V 1.5A Power Adapter		PFM321	12V 1A Power Adapter	
		PFM320D-015	12V 1.5A Power Adapter	

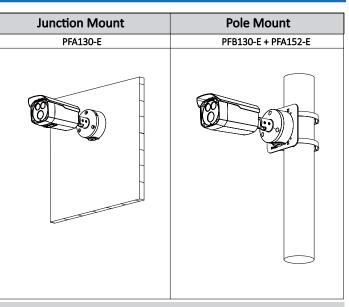

Dimensions (mm/inch)

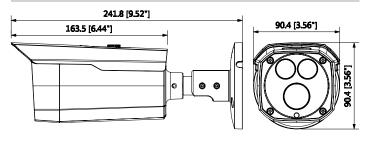

Accessories

Optional:





PFA130-E Junction box

PFA152-E Pole mount



PFM800-4MP



PFM801-4MP Passive HDCVI Balun Passive HDCVI Balun With Power



PFM320D-015 Power Adapter



PFM321 12V 1A Power Adapter

